



CROWN RF



2005A Industrial Blvd. Rockwall, TX 75087 972-771-4711 972-771-9499 (fax) 800-225-3429 (toll free)
sales@crownerf.com www.crownerf.com

RG-179B DATA SHEET


CONSTRUCTION PARAMETERS:

		<u>OD (in.)</u>
CONDUCTORS:	SPCCS (Silver Plated Copper Covered Steel)	0.037
DIELECTRIC:	Teflon	0.116
SHIELDING:	Braided SPC (Silver Plated Copper)	0.116
JACKET:	Extruded FEP	0.195

ELECTRICAL PROPERTIES:

CONDUCTOR RESISTANCE:	24.4 ohm Max / 100 ft.
IMPEDANCE:	75 ohm
CAPACITANCE:	19.5 pF/ft
VELOCITY OF PROPAGATION:	69.5%

CABLE CROSS-SECTION

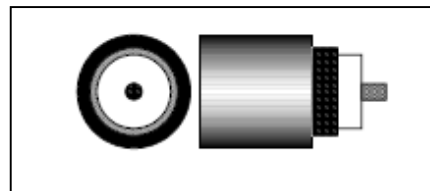

ATTENUATION:

(Max. db/100 ft):	400MHz	21
-------------------	--------	----

MISCELLANEOUS INFORMATION:

JACKET COLOR:	BROWN-TRANSPARENT
FLAME RATING:	PASSES IEC 60332-3-24
FLAMMABILITY:	PASSES VW-1
MAX. TEMPERATURE RATING:	-70 / 200° C
MAX. OPERATING VOLTS:	900
APPROX. WEIGHT (lb/1000ft):	10

*****THIS PRODUCT COMPLIES WITH EUROPEAN DIRECTIVE 2002/95/EC (RoHS)*****