



CROWN RF



2005A Industrial Blvd. Rockwall, TX 75087 972-771-4711 972-771-9499 (fax) 800-225-3429 (toll free)
sales@crownerf.com www.crownerf.com

RG-405 TYPE (CONFORMABLE)


CONSTRUCTION PARAMETERS:

CONDUCTORS:	SOLID SILVER PLATED COPPER COVERED STEEL	<u>OD (in.)</u>
DIELECTRIC:	PTFE	0.0201
SHIELDING:	COPPER-TIN COMPOSITE BRAID 100% COVERAGE	0.062
		0.085

ELECTRICAL PROPERTIES:

CONDUCTOR RESISTANCE:	65.7 ohm Max / 1,000 ft.
IMPEDANCE:	50 ohm
CAPACITANCE:	29.5 pF/ft
VELOCITY OF PROPAGATION:	69.5%

CABLE CROSS-SECTION

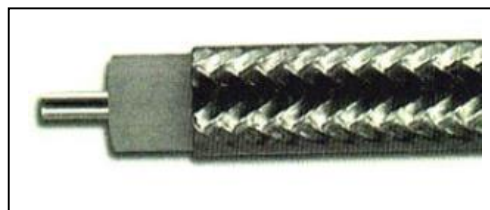

ATTENUATION:

(Max. db/100 ft):	500 MHz	15
	1000 MHz	22.5
	5000 MHz	54.9
	10,000 MHz	81.2
	20,000 MHz	120

MISCELLANEOUS INFORMATION:

APPROX. WEIGHT (lb/1000ft): 14

*****THIS PRODUCT COMPLIES WITH EUROPEAN DIRECTIVE 2002/95/EC (RoHS)*****